

Cassette 840x840 4 Tubes

FICHE PRODUIT



RM12F
Télécommande
recommandée

Produit certifié par:




CARACTÉRISTIQUES

Modèle	MKA-V600FA (V2)	MKA-V950FA (V2)	MKA-V1500FA (V2)
Puissance frigorifique B/H	3,64 / 4,96 kW	4,28 / 5,31 kW	5,84 / 8,04 kW
Puissance calorifique B/H	4,61 / 6,15 kW	5,44 / 6,74 kW	7,51 / 9,93 kW
Consommation B/H	30 / 62 W	43 / 90 W	49 / 139 W
Débit d'air bas/moy/haut	783/997/1.184 m³/h	1.001/1.115/1.403 m³/h	1.096/1.297/1.708 m³/h
Débit d'eau frigorifique H	0,63 / 0,85 m³/h	0,74 / 0,91 m³/h	1,00 / 1,39 m³/h
Débit d'eau calorifiqueH	0,40 / 0,53 m³/h	0,47 / 0,58 m³/h	0,65 / 0,85 m³/h
Perte charge évaporateur frig. B/H	8,10 / 14,80 kPa	10,90 / 16,40 kPa	17,70 / 33,00 kPa
Perte charge évaporateur cal. B/H	14,50 / 25,30 kPa	23,50 / 34,00 kPa	27 / 48,70 kPa
Connexions hydrauliques froid	Ø3/4"	Ø3/4"	Ø3/4"
Connexions hydrauliques chaud	Ø1/2"	Ø1/2"	Ø1/2"
Alimentation	220-240 V / 1 / 50 Hz		
Câble alimentation	(2+T)x2,50 mm²		

SCHÉMA CONNEXION

NOTE:
1.ALARM: Error codes or protections occurred , a closed signal output.
2.ON/OFF: Short circuit, forced off; otherwise, all the controllers available

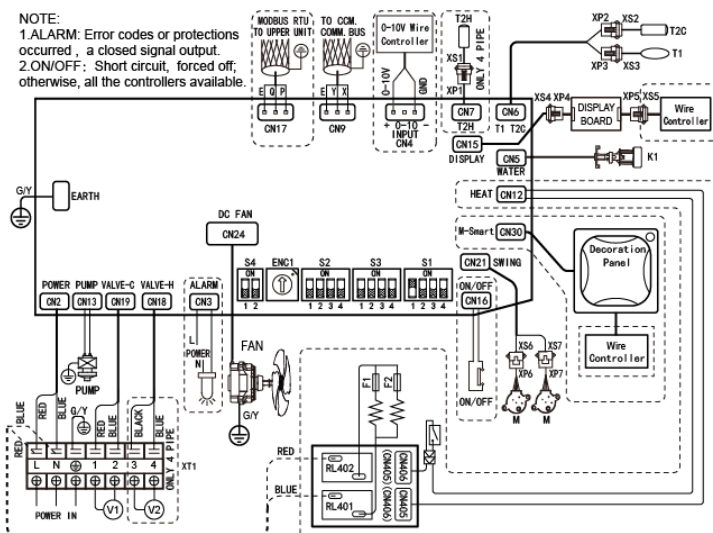

	ON	OFF		ON	OFF	
S1			2 pipe			Temp.compensation value is 0 under cool mode(default)
			4 pipe(default)			Temp.compensation value is 1 under cool mode
			Without enforcement to turn wind			Temp.compensation value is 2 under cool mode
			With enforcement to turn wind Normal anti-cold wind(default)			Temp.compensation value is 3 under cool mode
S2			High temperature anti-cold wind			Temp.compensation value is 4 under heat mode(default)
			Turn on E-heater and heating valve (default)			Temp.compensation value is 5 under heat mode
			Turn on E-heater			Temp.compensation value is 6 under heat mode
			Turn on E-heater valve Turn off heating valve			Temp.compensation value is 8 under heat mode

CODE	DESCRIPTION
CN1-30	P.C BOARD SOCKETS
K1	WATER LEVEL SWITCH
DC FAN	INDOOR DC FAN MOTOR
M	SWING MOTOR
PUMP	PUMP MOTOR
T1	ROOM TEMPERATURE
T2C/T2H	PIPE TEMPERATURE
XP1-7	CONNECTORS
XS1-7	CONNECTORS
XT1	7-WAY TERMINAL

ENC1 & S4	SWITCH FOR ADDRESS SETTING		Address 0-15	S3		MKA-V600FA
	"0" of the ENC1 and "ON/OFF" of the S4, the different position represents a different address. It can be combined 64 address(0-63)		Address 16-31			MKA-V750FA
			Address 32-47			MKA-V850FA
			Address 48-63			MKA-V950FA
			Address 0-8			MKA-V1200FA
Power supply		Control board		1		MKA-V1500FA



NOTES:

(1) Les données et spécifications présentes sur cette fiche peuvent varier sans préavis.

(2) Les images sur cette fiche sont indicatives et peuvent être différentes de la machine finale.

DIMENSIONS ET POIDS UNITÉ INTÉRIURE

Modèle	Largeur	Hauteur	Profondeur	Poids
MKA-V600FA (V2)	840 mm	230 mm	840 mm	23 kg
MKA-V950FA (V2)				27 kg
MKA-V1500FA (V2)				29,5

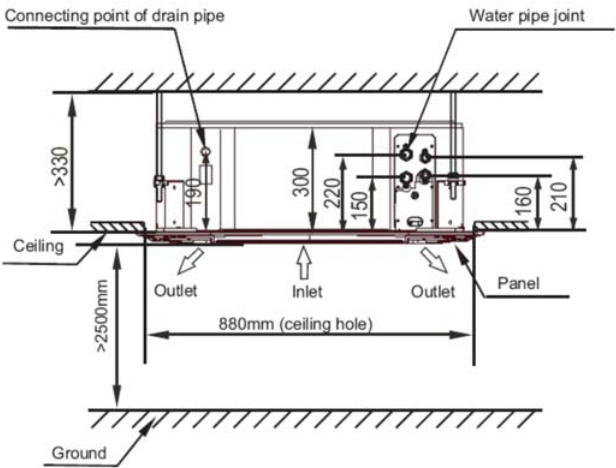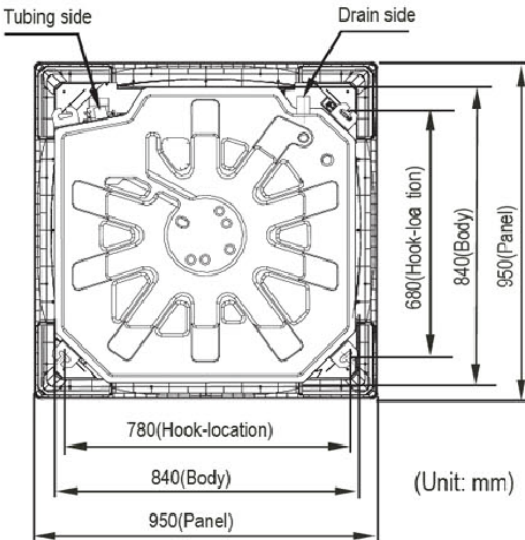

DIMENSIONS ET POIDS FAÇADE

Modèle	Largeur	Hauteur	Profondeur	Poids
T-MBQ4-01E(S)	950 mm	55 mm	950 mm	6 kg

